


SOLAR CORRUGATED CONDUIT HD GREY

FEATURES

- Electro-insulating corrugated conduit
- UV Stabilized Grey
- Compression Strength $\geq 1250\text{N}$

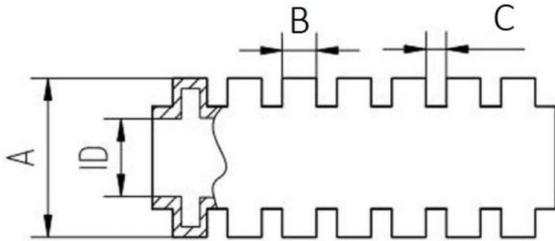

PRODUCT SPECIFICATION

PART NO.	ID (mm)	A (mm)	B (mm)	C (mm)
CCS2050	15	19.8 ~ 20	2.5	1.5
CCS2550	18	24.8 ~ 25	2.5	1.5

ORDERING INFORMATION

PART NO.	DESCRIPTION	UNIT	QTY	SIZE (cm)	WEIGHT (kg)
CCS2050	CORRUGATED CONDUIT SOLAR GREY 20MM X 50M	ROL	1	40 x 40 x 20.5	6.0
CCS2550	CORRUGATED CONDUIT SOLAR GREY 25MM X 50M	ROL	1	47 x 47 x 24	8.2

VERSION 2 11/19

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.