



GENERAL INFO

SPECIFICALLY DESIGNED FOR RAINWATER SUPPLY

Safe and great-tasting water using rainwater in your home or facility.

The Puretec HybridPlus is an all-in-one filtration system including pump*, 3 stage filtration and finishing with UV sterilisation. This sleek, practical and high-quality system ensures you have pressurised safe and delicious rainwater. The patented HybridPlus system is designed to sit neatly against a wall, fence or tank, or can also be freestanding. It features a lockable cabinet with gull-wing style access doors for ease of access for maintenance and also incorporates adjustable feet to ensure a neat and tidy finished installation.

FEATURES & BENEFITS

- Premium Puretec four-stage water treatment including UV protection with filter monitor gauges, lamp fail alarms, lamp count-down timer and surge protection.
- Designed specifically for rainwater the Puretec HybridPlus is a complete plug & play package with pump* filters & UV in one unit that is weatherproof, rodent-proof, tamper proof and reduces pump noise.
- Bacteria protection Kills 99.9% of E. Coli, Giardia and Cryptosporidium Cysts with Radfire ™ ultraviolet technology, a natural process that's completely eco-friendly and chemical-free.
- Unique connection system so that water flow can be connected to the left or right-hand sides for a fast, easy and neat installation.

- Patented cabinet with gull-wing style access doors looks great whilst providing easy access for maintenance, is corrosion resistant and lockable to prevent tampering.
- Premium pump*, pressure controller and optional mains/rains changeover switch to ensure adequate pressure and seamless back up from the mains/municipal water supply.
- · Neatly concealed ventilation to allow airflow and heat dissipation.
- P1 model includes a pump provision to allow for your own pump installation and compatible with a range of pumps.
- Suitable for other water supplies depending on water quality (refer to Puretec Customer Care).



HYBRID-P1

20" 1" connection



HYBRID-P3

20", 1" connection, with CMB-SP 3-47 pump (0.5 kW)



HYBRID-P6

20", 1" connection, with CMB-SP 5-47 pump (0.9 kW)



HYBRID-P9

20", 1" connection, with CMB-SP 3-47 pump (0.5 kW) & mains to rain controlle



HYBRID-P12

20", 1" connection, with CMB-SP 5-47 pump (0.9 kW) & mains to rains controlle



HYBRIDPLUS SERIES

| TECHNICAL DATA | | | | | |
|-----------------------------------|---|--------------|---------------------|-------------|-------------|
| Ordering Code | HYBRID-P1 | HYBRID-P3 | HYBRID-P6 | HYBRID-P9 | HYBRID-P12 |
| Replacement parts and cartridges: | | | | | |
| Stage 1 filtration: | PL05MP2 | | | | |
| Stage 2 filtration: | CB05MP2 | | | | |
| Stage 3 filtration: | PX01MP2 | | | | |
| UV lamp, 46W | RL6 | | | | |
| Quartz sleeve: | RQS6 | | | | |
| Grundfos pump model: | not included | CMB-SP 3-47 | CMB-SP 5-47 | CMB-SP 3-47 | CMB-SP 5-47 |
| Rated power: | N/A | 0.5 kW | 0.9 kW | 0.5 kW | 0.9 kW |
| Pressure controller: | | | PM2 | | |
| Mains to rains controller: | not included | not included | not included | standard | standard |
| Power supply: | | | 220-240 VAC / 50 Hz | | |
| Maximum current consumption: | - | 3.1-2.8 A | 5.4-5.0 A | 3.1-2.8 A | 5.4-5.0 A |
| Water temperature range: | 0-52°C (protect from freezing) | | | | |
| Supply pressure: | 300 - 520 kPa (Install Pressure Limiting Valve if pressure exceeds 520 kPa) | | | | |
| Self-priming: | 4 m | | | | |
| UV dosage @40mJ/cm2: | 54 Lpm | | | | |
| UV dosage @30mJ/cm2: | 70 Lpm | | | | |
| UV dosage @16mJ/cm2: | 130 Lpm | | | | |
| Pump flow rate: | - | 50 Lpm | 86 Lpm | 50 Lpm | 86 Lpm |
| Connection: | 1" BSP [25mm] | | | | |
| Warranty: | 3 years^ | | | | |

Important Note: Use only genuine Puretec replacement cartridge. Flow rate @30mJ/cm² is the industry standard for drinking water.

ADDITIONAL INFORMATION

Where the water being treated contains unusually high levels of dissolved solids particularly hard water, iron, manganese or biological organisms, a deposit build-up on the quartz sleeve may occur over time. Maximum recommended parameters are as follows:

| Iron: | less than 0.3 mg/L | |
|-------------------|---------------------|--|
| Hydrogen Sulfide: | less than 0.05 mg/L | |
| Suspended Solids: | less than 10mg/L | |
| Manganese: | less than 0.05 mg/L | |
| Hardness: | less than 110mg/L | |



HYBRIDPLUS SERIES

DIAGRAM & FILTRATION TECHNOLOGY

Designed specifically for rainwater, the Puretec HybridPlus is a complete plug & play package with pump*, filters & UV in one unit that is weatherproof, rodent-proof, tamper-proof and reduces pump noise.

The HybridPlus Series systems are manufactured by Puretec to stringent standards and tested to ensure that AU/NZ standards are met and exceeded. The HybridPlus systems are suitable for both tank only, mains water back-up, bore water and surface water treatment subject to water quality.



Premium Puretec four stage water treatment including UV protection with filter monitor gauges lamp fail alarm, lamp count-down timer and surge



A 3-point locking system ensures the unit is secure from tampering or vandalism.

Provisional bolt-holes so the system can be fixed to a platform or slab, securing it from high winds and vandalism

Adjustable feet to eliminate instability and vibration



g style access doors look great whilst providing easy access for maintenance is corrosion resistant and lockable to prevent tampering.

Patented cabinet with gull-

Unique connection system so that water flow can be connected to the left or right hand sides for fast, easy and neat installation

Premium pump*, pressure controller and optional mains/rain changeover switch to ensure adequate pressure and seamless back up from the mains/municipal water supply.

STAGE 4: BACTERIA PROTECTION

Kills 99.99% of E. Coli, Giardia and Cryptosporidium Cysts with Radfire™ ultraviolet technology, a natural purification process that's completely eco-friendly and

Patent Pending

dirt, sand and particles down to 5 micron. STAGE 2: TASTE AND ODOUR REMOVAL


Reduces had taste, odour, herbicides, pesticides and chemicals.

*HybridPlus P3, P6, P9 and P12 models. *Fittings on installed picture not included. HybridPlus P12 model pictured.



Patented Cabinet with Gull-wing Style Access Doors.

The HybridPlus Series incorporates a weather cabinet for outdoor installations. It's 3-point locking system also ensures the unit is secure from tampering or vandalism.



Note: Hybrid-P1 model does not include a pump or switchover valve but has the allowance to install your own pressure system into the unit.

Max pump dimensions: 560 (H) x 540 (W) x 240 (D) mm.



Premium Four Stage Filtration including UV Protection


The Puretec HybridPlus includes Radfire™ UV technology protection with filter monitor gauges, lamp fail alarms, lamp count-down timer and surge protection.







PRODUCT DIMENSIONS Measurements in Millimeters (mm)

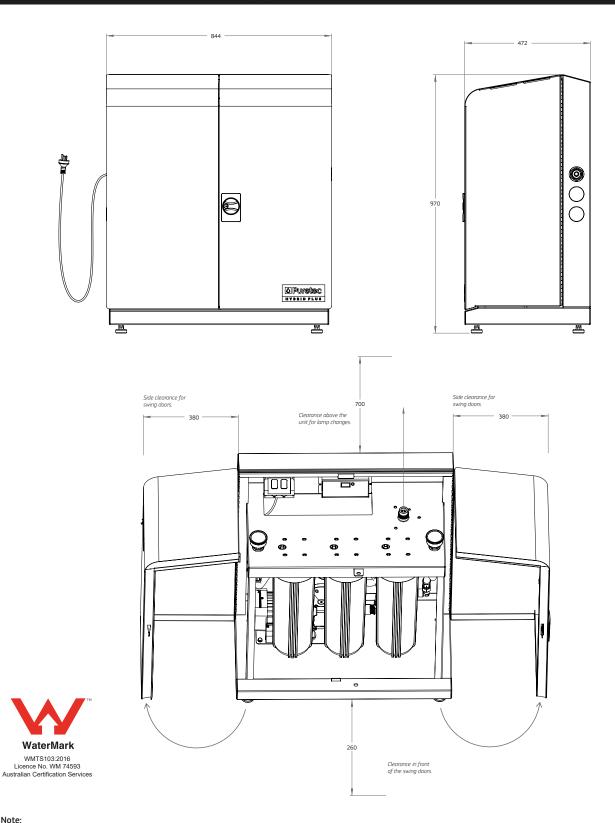

Note:

- 1. No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change.
- 2. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems.
- 3. ^Warranties in this document cover parts for 3 years and include cover for parts and labour for the first year where applicable, subject to approval excluding the pump which is covered by Grundfos's own back-to-base 2 year warranty.

Our Water Filtration Specialists can provide you with advice to suit your needs.