



Kimberley
accessories

PRODUCT CATALOGUE

DATA SHEET

CABLE TIES- UV STABILISED

Attributes:

- UV Stabilised Nylon 66
- Halogen Free
- Operating Temperature -40°C to +85°C
- Minimum Bundle and Tensile strength see table below



Item Code	Length (mm)	Width (mm)	Min Bundle Dia (mm)	Tensile strength (kg)
KIMCT100BK	100	2.5	22	8
KIMCT150BK	150	3.6	36	18
KIMCT200BK	200	4.8	52	22
KIMCT250BK	250	4.8	68	22
KIMCT300BK	300	4.8	83	22
KIMCT368BK	369	4.8	105	22
KIMCT430BK	432	4.8	125	22

DATA SHEET

CABLE TIES - Natural

Attributes:

- Nylon 66
- Halogen Free
- Operating Temperature -40°C to +85°C
- Minimum Bundle and Tensile strength see table below



Item Code	Length (mm)	Width (mm)	Min Bundle Dia (mm)	Tensile strength (kg)
KIMCT100NT	100	2.5	22	8
KIMCT150NT	150	3.6	36	18
KIMCT200NT	200	4.8	52	22
KIMCT250NT	250	4.8	68	22
KIMCT300NT	300	4.8	83	22
KIMCT368NT	369	4.8	105	22

DATA SHEET

CABLE TIES- UV STABILISED HEAVY DUTY

Attributes:

- UV Stabilised Nylon 66
- Halogen Free
- Operating Temperature -40°C to +85°C
- Minimum Bundle and Tensile strength see table below



Item Code	Length (mm)	Width (mm)	Min Bundle Dia (mm)	Tensile strength (kg)
KIMCT200BKHD	200	7.6	52	55
KIMCT370BKHD	370	7.6	101	55
KIMCT710BKHD	710	9.0	209	80

DATA SHEET

NYLON CABLE GLAND

Attributes:

- Polyamide 66
- IP 68 Rating
- UV stabilised for outdoor use
- Metric Thread
- Complete with locknut and body seal



Item code	O.D. (mm)	Width of Thread	A/F (mm)	Standard Pack
KIMNCG12	3-6.5	8	15	40
KIMNCG16	5-10	15	21.8	40
KIMNCG20	10-14	15	26.3	25
KIMNCG25	13-18	15	32	15
KIMNCG32	18-25	15	41.5	5
KIMNCG40	22-32	18	49.2	5
KIMNCG50	30-38	18	59.2	2
KIMNCG63	34-44	18	71.2	2

DATA SHEET

NYLON SNAP BUSHING

Attributes:

- Simple method of protecting cables from sharp edges in panel holes
- Self-locking teeth which snap into place
- Available in range of sizes



Item Code	Hole size (mm)	Inner Dia (mm)	Outer Dia (mm)	Height (mm)	Pack Size
KIMNSB13/100	12.7	8.2	14.5	10.3	100
KIMNSB16/100	15.9	12.2	18.6	10.3	100
KIMNSB19/50	19	14.3	21.5	10.3	50
KIMNSB22/25	22	17.3	23.8	11.5	25
KIMNSB25/25	25.1	19.1	28	11.5	25
KIMNSB30/25	29.7	24.1	32.3	11.5	25
KIMNSB38/10	38.1	29.0	41.2	11.4	10
KIMNSB50/5	49.6	41.5	54	11.6	5

DATA SHEET

SELF ADHESIVE MOUNT

Attributes:

- Low profile & 4 way base that will stick to almost any surface
- Choice between indoor and outdoor mount
- Outdoor Stick on mount is UV resistant



Item Code	Base Dim (mm)	Height (mm)	Max Tie Width (mm)	Pack Quantity	Use
KIMSAM19NT/100	19 x 19	4	3.6	100	Indoor
KIMSAM25NT/100	27.7 x 27.7	5.7	5.3	100	Indoor
KIMSAM19BK/100	19 x 19	4	3.6	100	Black Outdoor
KIMSAM25BK/100	27.7 x 27.7	5.7	5.3	100	Black Outdoor

DATA SHEET

CHRISTMAS TREE ANCHOR

Attributes:

- Creates an anchor point in almost any material e.g. concrete brick and wood
- Deforms outwards when driven into a hole due to Christmas tree design
- Made from Nylon 66
- Black for outdoor and UV resistance



Item Code	Mount Hole Max. (mm)	Drill Hole Dia. Nom. (mm)	Depth of Hole (mm)	Pack Qty
KIMCTA630/100	2.4 x 10	6	30	100
KIMCTA940/50	3.0 x 10	8.5-9	40	50

DATA SHEET

WALL ANCHORS

Attributes:

- Easy penetration for fast installation
- Easily removed from wall
- Low profile head for flush fixing
- Available in Nylon or Zinc



Item Code	Screw Gauge	Material
KIMWA68N/100	6-8	Nylon
KIMWA68Z/100	6-8	Zinc

DATA SHEET

SCREW CONNECTORS

Attributes:

- 2 cables
- Clear Insulated
- Large insulation cover for safety



Item Code	Nominal Rated Voltage	Material Contact	Material Housing	Number of Screws
KIMSC1/100	415 VAC	Brass	Plastic	1
KIMSC2/50	415 Vac	Brass	Plastic	2



DATA SHEET

HEAT SHRINK- THIN WALL

Attributes:

- Shrink Ratio 2:1
- Shrinking temperature 80 to 120°C
- Operating temperature -45 to +135°C
- Water Absorption < 0.2%
- Material Breakdown > 15KV/mm
- Voltage rating 600V
- Elongation at breaking point >300%
- Sizing available from 2.4 to 76mm in Diameter
- Various colours available including Black, Red, White, Blue, Clear, Yellow/Green





DATA SHEET

HEAT SHRINK- MEDIUM WALL

Attributes:

- Adhesive lined
- Shrink Ratio 3:1
- Shrinking temperature 70 to 125°C
- Operating temperature -45 to +110°C
- Water Absorption < 0.5%
- Material Breakdown > 20KV/mm
- Voltage rating 1KV
- Elongation at breaking point >400%
- Sizing available from 12 to 92mm in Diameter



DATA SHEET

HEAT SHRINK- END CAP

Attributes:

- Adhesive lined
- Unlimited storage life
- Resistant to UV rays, chemicals and corrosion
- Operating Temp -35°C to +110°C



Item Code	Inner Diameter (mm)		Cable Range OD (mm)	Length (mm)
	Pre Shrink	Post Shrink		
KIMSRE1	12	4	4-10	40
KIMSRE2	20	6	6-16	55
KIMSRE3	40	16	18-32	90
KIMSRE4	55	26	28-48	103
KIMSRE5	100	52	55-90	140



DATA SHEET

MOUNTING BRACKET & CLIPS

Attributes:

- A Bracket/Clip for all mounting applications
- Suitable for installation of all leading Bakelite
- Recessed brackets ideal for various slim profile series
- Designed for ease of installation

	Item	Description	Dimensions (mm)		
			Length	Width	Depth
1	KIMEBC	C-TYPE WALLBOARD CLIP	120	50	13
2	KIMEWP	VERTICAL AND HORIZONTAL PLASTER BRACKET	152	152	3
3	KIMEBH	HORIZONTAL BRACKET	137	72	37
4	KIMEBHN	HORIZONTAL BRACKET WITH NAILS	137	72	37
5	KIMEBHNA	HORIZONTAL BRACKET WITH SKEWED NAILS	135	72	37
6	KIMEBVH	VERTICAL AND HORIZONTAL BRACKET	158	92	38
7	KIMEBV	VERTICAL MOUNTING	102	90	38
8	KIMEBVN	VERTICAL MOUNTING WITH NAILS	102	90	38
9	KIMEBVNA	VERTICAL BRACKET WITH SKEWED NAILS	130	90	22
10	KIMEBCR	C-TYPE WALLBOARD CLIP- RECESSED	120	50	11
11	KIMEWPR	VERTICAL AND HORIZONTAL PLASTER BRACKET- RECESSED	152	152	10
12	KIMEBHNR	VERTICAL AND HORIZONTAL BRACKET WITH SKEWED NAILS- RECESSED	128	102	22
13	KIMEBVNR	VERTICAL BRACKET WITH SKEWED NAILS- RECESSED	130	90	22




Kimberley
accessories


DATA SHEET




KIMEBC



KIMEWP

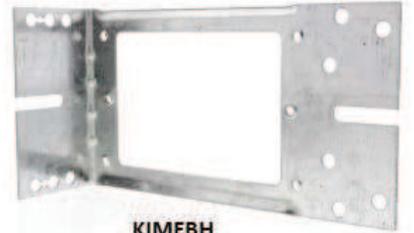

KIMEBH



KIMEBHN



KIMEBHNA



KIMEBVH



KIMEBV




KIMEBVN



KIMEBVNA



KIMEBCR



KIMEWPR



KIMEBHNA



KIMEBVNA

DATA SHEET

CONDUIT HALF SADDLE

Attributes:

- Zinc plated, Stainless Steel or hot dip galvanized for strength
- Varied hole size for fixing



	Nominal Diameter (mm)	Hole (mm)	Length (mm)	Width (mm)	Height (mm)	Surface Treatment
KIMCHS12	12.7	5	36	16	15	Zinc plated
KIMCHS16	16	5	46	19	18	Zinc plated
KIMCHS20	20	5	50	19	22	Zinc plated
KIMCHS25	25	5	60	25	26	Zinc plated
KIMCHS32	32	7	67	24	33	Zinc plated
KIMCHS40	40	7	74	32	41	Zinc plated
KIMCHS50	50	7	85	39	54	Zinc plated
KIMCHS20A	20	6.5	50	19	22	Zinc plated
KIMCHS25A	25	6.5	60	25	26	Zinc plated
KIMCHS16HDG	16	5	46	19	18	Hot dip Galvanized
KIMCHS20HDG	20	5	50	19	22	Hot dip Galvanized
KIMCHS25HDG	25	5	60	25	26	Hot dip Galvanized
KIMCHS32HDG	32	7	67	24	33	Hot dip Galvanized
KIMCHS40HDG	40	7	74	32	41	Hot dip Galvanized
KIMCHS50HDG	50	7	85	39	54	Hot dip Galvanized
KIMCHS16SS	16	5	46	19	18	Stainless Steel
KIMCHS20SS	20	5	50	19	22	Stainless Steel
KIMCHS25SS	25	5	60	25	26	Stainless Steel
KIMCHS32SS	32	7	67	24	33	Stainless Steel
KIMCHS40SS	40	7	74	32	41	Stainless Steel

DATA SHEET

CONDUIT FULL SADDLE

Attributes:

- Zinc plated or hot dip galvanized for strength
- Varied hole size for fixing
- Custom shape for ease of attachment
- High quality construction for extra durability



Item Code	Nominal Diameter (mm)	Gauge (mm)	Hole (mm)	Centres (mm)	Length (mm)	Width (mm)	Height (mm)	Surface Treatment
KIMCFS12	12.7	0.7	5	28	40	13	14	Zinc plated
KIMCFS16	16	0.7	5	32	45	13	18	Zinc plated
KIMCFS20	20	0.9	5	39	50	16	23	Zinc Plated
KIMCFS25	25	0.9	5	48	62	19	28	Zinc plated
KIMCFS32	32	1.2	6	63	79	25	35	Zinc plated
KIMCFS40	40	1.2	6	71	87	25	44	Zinc plated
KIMCFS50	50	1.2	6	92	108	25	53	Zinc plated
KIMCFS12HDG	12.7	0.7	5	28	40	13	14	Zinc plated
KIMCFS16HDG	16	0.7	5	32	45	13	18	Hot dip Galvanized
KIMCFS20HDG	20	0.9	5	39	50	16	23	Hot dip Galvanized
KIMCFS25HDG	25	0.9	5	48	62	19	28	Hot dip Galvanized
KIMCFS32HDG	32	1.2	6	63	79	25	35	Hot dip Galvanized
KIMCFS40HDG	40	1.2	6	71	87	25	44	Hot dip Galvanized
KIMCFS50HDG	50	1.2	6	92	108	25	53	Hot dip Galvanized
KIMCFS63HDG	63	1.6	7	107	130	39	66	Hot dip Galvanized

DATA SHEET

UNDERGROUND WARNING TAPE

Attributes:

- Non- Adhesive PVC Material
- Made to AS/NZS 2648.1 : 1995
- Lead free, high chemical resistant material
- Available in Orange (Electrical) and White (Communications)



Item Code	PRINTING	PRODUCT WIDTH	ROLL LENGTH
KIMUWTO100	Danger electrical cable below	150mm	100m
KIMUWTO500	Danger electrical cable below	150mm	500m
KIMUWTW100	Warning buried communications below	150mm	100m
KIMUWTW500	Warning buried communications below	150mm	500m



DATA SHEET

TEMP WARNING TAPE

Attributes:

- High Adhesive strength
- Yellow and Black colouring for easy identification
- Designed to affix to a variety of surfaces
- Text printing "Caution temporary construction wiring"



Item Code	Width	Length
KIMCWT66	38mm	66m



DATA SHEET

DOUBLE SIDED TAPE

Attributes:

- High Adhesive Strength
- Designed to work on a variety of surfaces



Item Code	Width	Thickness	Length
KIMDST12	12mm	1.7mm	10m
KIMDST18	18mm	1.7mm	10m
KIMDST24	24mm	1.7mm	10m



DATA SHEET

DUCT TAPE

Attributes:

- High adhesive Strength
- High elongation before breaking point- ideal for sealing jobs
- Designed to work on a variety of surfaces



Item Code	Width	Length
KIMDT30GY	48mm	30m
KIMDT30BK	48mm	30m

DATA SHEET

DOMESTIC EXT. LEAD

Attributes:

- White colour leads
- Ideal for home and office use
- Socket: 10A
- Plug: 10A
- Lead: 10A



	Length (m)	Cable Core Thickness (square mm)
KIMELD2W	2	1
KIMELD3W	3	1
KIMELD5W	5	1
KIMELD7W	7	1
KIMELD10W	10	1

DATA SHEET

HEAVY DUTY EXT. LEAD

Attributes:

- Clear Socket and plug for easy inspection with LED indicator
- Ideal for workshop & factory use
- Current: 10 Amp max
- Voltage: 230-240V ac 50Hz



	Length (m)	Cable Core Thickness (square mm)
KIMELHD10Y	10	1
KIMELHD15Y	15	1
KIMELHD20Y	20	1
KIMELHD25Y	25	1



DATA SHEET

EXTRA HEAVY DUTY EXT. LEAD

Attributes:

- Clear Socket and plug for easy inspection with LED indicator
- Ideal for industrial & constructions sites
- Current: 10 amp max
- Extra heavy duty plug, socket and PVC outer
- Voltage: 230-240V ac 50Hz



	Length (m)	Cable Core Thickness (square mm)
KIMELXHD10R	10	1.5
KIMELXHD20R	20	1.5
KIMELXHD30R	30	1.5

DATA SHEET

15A HEAVY DUTY EXT. LEAD

Attributes:

- Clear Socket and plug for easy inspection with LED indicator
- Ideal for caravan campsites or high powered appliances
- Current: 15 Amp max
- Voltage: 230-240V ac 50Hz



	Length (m)	Cable Core Thickness (square mm)
KIMEL15A80	8	1.5
KIMEL15A200	20	1.5

DATA SHEET

PLUG & CORD

Attributes:

- Used to connect power to equipment, light fittings, lamps and more
- Available in 2 and 3 pin plug configurations
- 7.5 to 10 Amp ratings



Item Code	Pin	Amps	Colour	Length (m)	Ring Terminal
KIMPC3P10G1.7M	3	10	Grey	1.7	Yes
KIMPC3P10B2M	3	10	Black	2	Yes
KIMPC3P10B2MNT	3	10	Black	2	No
KIMPC3P10G2M	3	10	Grey	2	Yes
KIMPC3P10G2MNT	3	10	Grey	2	No
KIMPC3P10G3MNT	3	10	Grey	3	No
KIMPC2P7.5B2M	2	7.5	Black	2	Yes
KIMPC2P7.5B2MNT	2	7.5	Black	2	No
KIMPC3P7.5G1.7M	3	7.5	Grey	1.7	Yes
KIMPC3P7.5G2M	3	7.5	Grey	2	Yes
KIMPC3P7.5G3M	3	7.5	Grey	3	Yes