

HYDROTAP G5 BCHA CELSIUS ALL-IN-ONE ARC **CHROME**







BOILING

CHILLED

HOT & AMBIENT

FILTERED

UNFILTERED

Order Code H57784Z00AU

Zip HydroTap Design Range CELSIUS All-In-One Boiling & Chilled Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.

Manufacturing Code	H57784Z00AU
Capacity	Residential




Water Pressure Min 170kPa - M Water Connection 1/2" BSP (G1/2) Water Supply Requirements Water Valves Integrated 500k Power Rating 1.8kW 220-240k Power Supply 1 x 10 Amp soci	
Water Connection 1/2" BSP (G1/2) Water Supply Cold and Hot Requirements Water Valves Integrated 500k Power Rating 1.8kW 220-240k Power Supply 1 x 10 Amp soci	esign Range CELSIUS All-In-One ARC Tap (Chrome)
Water Supply Requirements Water Valves Integrated 500k Power Rating 1.8kW 220-240k Power Supply 1 x 10 Amp soci Dimensions W280mm x D45	ax 700kPa
Requirements Water Valves Integrated 500k Power Rating 1.8kW 220-240k Power Supply 1 x 10 Amp soci Dimensions W280mm x D45	
Power Rating 1.8kW 220-240 V Power Supply 1 x 10 Amp sock Dimensions W280mm x D45	
Power Supply 1 x 10 Amp soci Dimensions W280mm x D45	Pa Pressure limiting valve and Dual Check Valve
Dimensions W280mm x D45	/ 50Hz
	ket outlet
Product Approvals WaterMark, RCI	55mm x H333mm
	M, ARC
Wels Rating 5 Star, 6.0 litres	

5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

Installation Detail

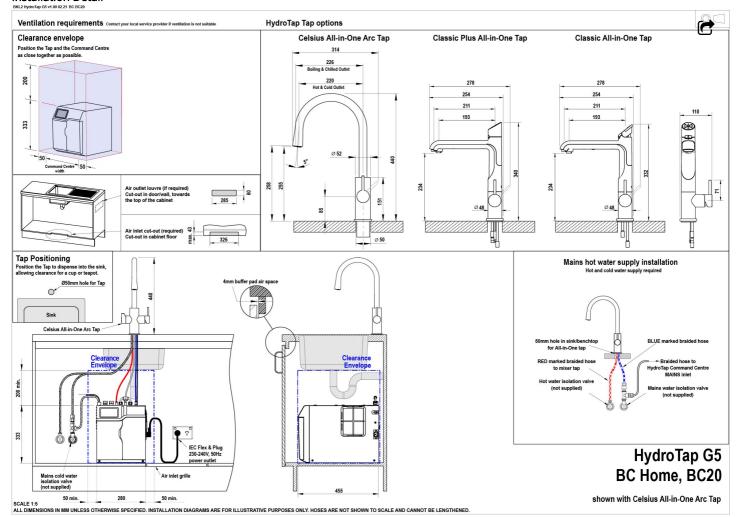

Tap Detail

