



## TRADESTAR SE7169MP TC - 70/300W

A versatile LED floodlight range with four models ranging from 70 - 300 watt, with selectable CCT and power.

### Application

Perfect for any exterior space from residential small wattage designs through to high performance commercial applications

### Design Specifications

- Integral LED control gear, non-dimmable 70, 100, 150, 200, 250, 300 watt models, with selectable power
- Robust black die-cast aluminium body profile with multi-function angled trunnion bracket, IK08, IP66 protection
- Pre-wired with 1500mm UV rated flex for easy installation
- CRI >80, selectable CCT 3000/4000/5000K
- An impressive 140lm/W optical performance at 4000K
- Tempered glass visor



## Technical Specification


| Product                                                                            | Model No.     | Input Voltage (V/AC) | Multiple Wattage | Lumens (lm)       | CCT (K)        | CRI |
|------------------------------------------------------------------------------------|---------------|----------------------|------------------|-------------------|----------------|-----|
|   | SE7169MP70TC  | 240                  | 35/53/70         | 4900/7360/9800    | 3000/4000/5000 | 80  |
|   | SE7169MP100TC | 240                  | 50/75/100        | 7000/10500/14000  | 3000/4000/5000 | 80  |
|   | SE7169MP150TC | 240                  | 75/113/150       | 10500/15750/21000 | 3000/4000/5000 | 80  |
|   | SE7169MP200TC | 240                  | 100/150/200      | 14000/21000/28000 | 3000/4000/5000 | 80  |
|   | SE7169MP250TC | 240                  | 125/188/250      | 17500/26500/35000 | 3000/4000/5000 | 80  |
|  | SE7169MP300TC | 240                  | 150/225/300      | 21000/31500/42000 | 3000/4000/5000 | 80  |

| Beam Angle (°) | Body Colour | Dim (mm)                | Mass (kg) |
|----------------|-------------|-------------------------|-----------|
| 110            | Black       | 280(L) x 55(W) x 246(H) | 2.52      |
| 110            | Black       | 280(L) x 55(W) x 246(H) | 2.52      |
| 110            | Black       | 310(L) x 55(W) x 345(H) | 3.49      |
| 110            | Black       | 334(L) x 57(W) x 351(H) | 4.08      |
| 110            | Black       | 435(L) x 63(W) x 395(H) | 7.01      |
| 110            | Black       | 435(L) x 63(W) x 395(H) | 7.21      |


NOTE: lumens displayed are @ 4000K CCT selection

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


## Dimensions

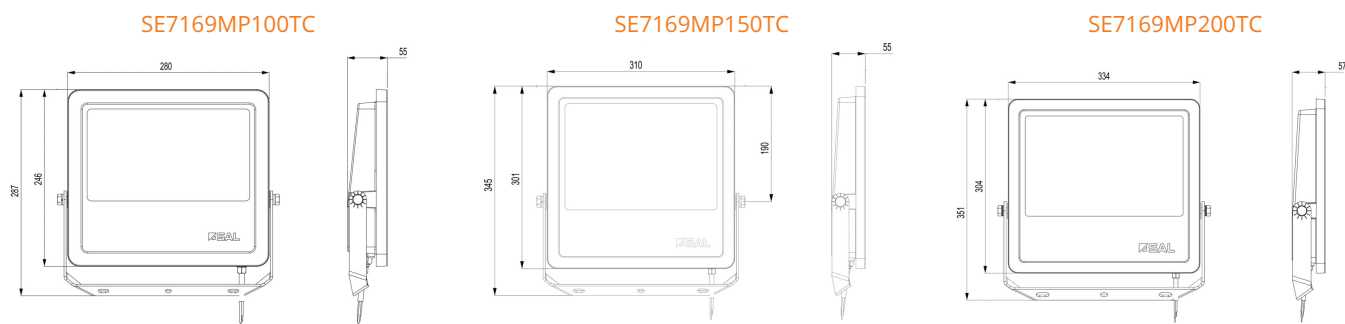

SE7169MP250TC

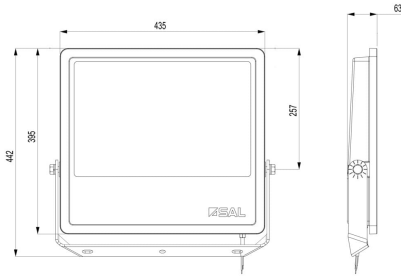


SE7169MP300TC

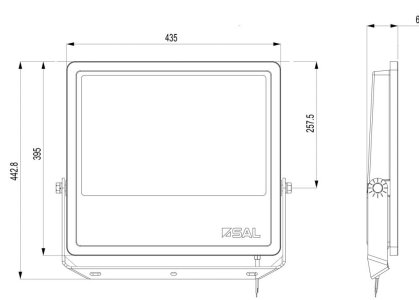


## Photometric Data


70W / 4000K

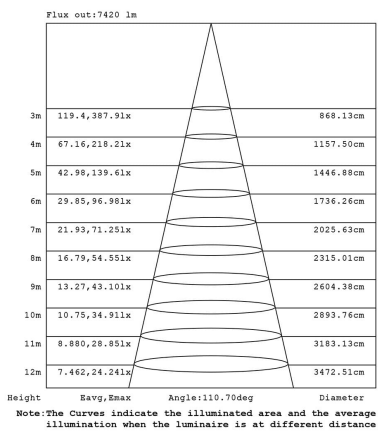


100W / 4000K

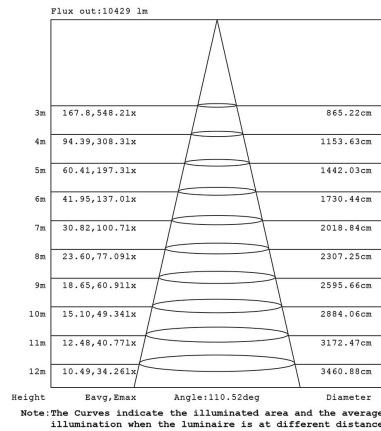


150W / 4000K

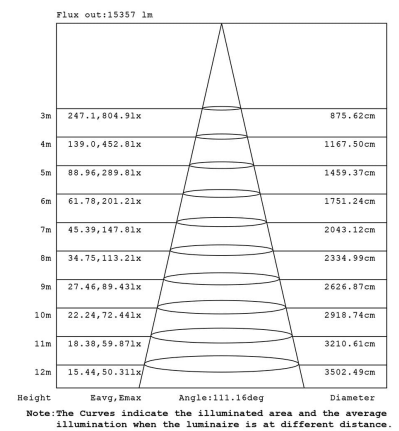

200W / 4000K

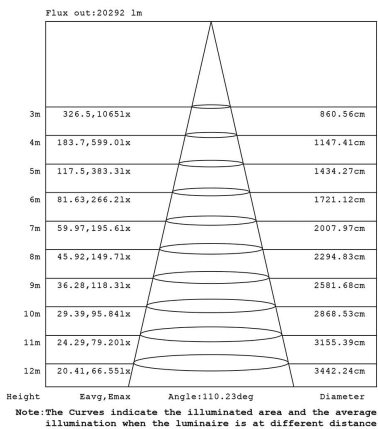

250W / 4000K

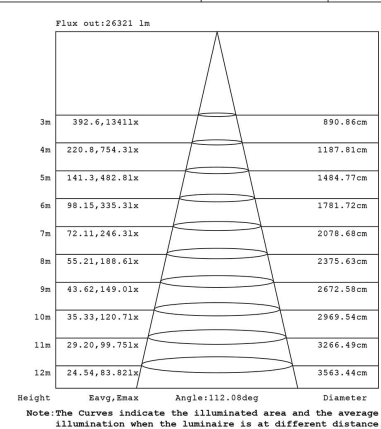

300W / 4000K

